


Numbered leads from case mounted components (below) connect to leads from subchassis shown above.

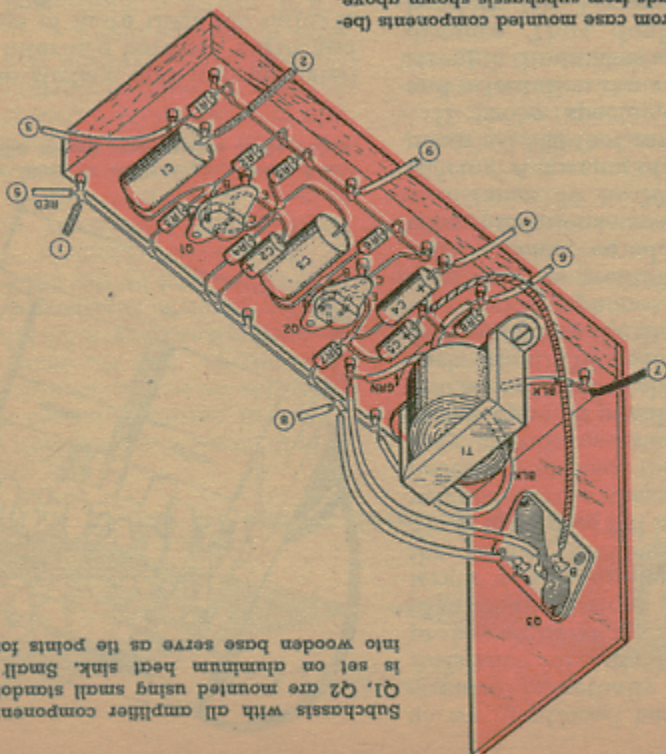

Subchassis with all amplifier components. Sockets of Q1, Q2 are mounted using small standoffs, Q3 socket is set on aluminum heat sink. Small nails driven into wooden base serve as tie points for components.