


π Speakers six π loudspeaker Crossover Diagram

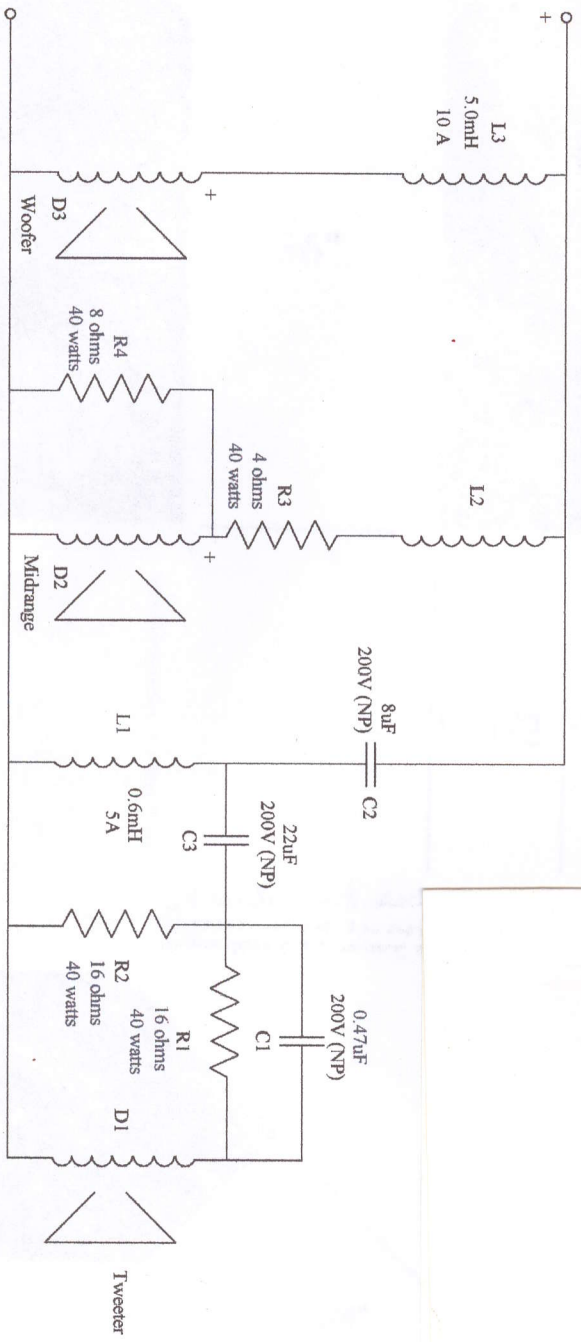

Note: Because of different I/F behavior, some drivers have different amplitude and phase response at the crossover point. See the chart below to determine the value of L2 and the connection method of the tweeter. Some midrange/tweeter connections should be in the same polarity, others reversed.

Driver	L2	Tweeter Polarity
Emittance Alpha 10	0.0 mH	Normal
Emittance Delta 10	1.0 mH	Reversed

PXB3:1K6
PSD 2002-8
ALPHA-10A
DELTA PRO-12